



MOOD DOWNLIGHT

Φ45
Fixed Round

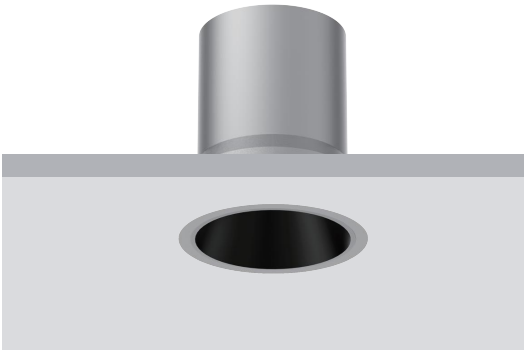

Fixed Optic

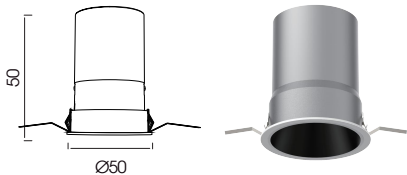


baffle




IP Rating:	IP20 and IP44 options
Optics:	24°/36°/50°
UGR:	< 10
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K/ 2000K-3000K/1800K-4000K/2700K-6000K

Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning:	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 100mA 4W DC 36V 150mA 6W
Ambient temp:	-20 °C to 45 °C
Class:	II
Optional accessories:	Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter




8W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	2868	0.24
1.0	717	0.49
1.5	319	0.73
2.0	179	0.98
2.5	115	1.22
3.0	80	1.46




8W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	2108	0.36
1.0	527	0.72
1.5	234	1.08
2.0	132	1.44
2.5	84	1.80
3.0	59	2.16



W system	lm system	optics	code
4W	303	24°	MFL4504W-30N24-W
4W	275	36°	MFL4504W-30N36-W
4W	263	50°	MFL4504W-30N50-W



W system	lm system	optics	code
6W	397	24°	MFL4506W-30N24-W
6W	410	36°	MFL4506W-30N36-W
6W	407	50°	MFL4506W-30N50-W