

ACME SPY



Φ57 Trimless In/out Spotlights



cutout :57mm



Adjustable Optic

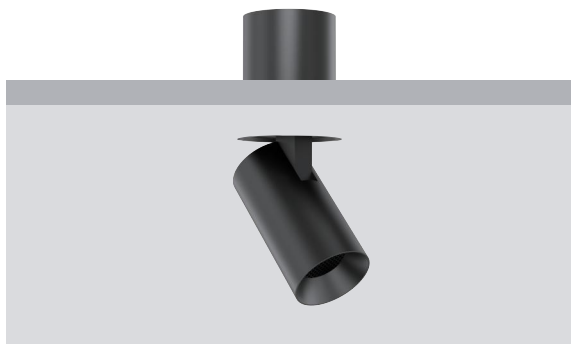

Standard



Black Painted
9005



White Painted
9016

Curated Finishes (MOQ 20 applies)



Polished Brass



Black Nickel



Bright Chrome



Rose Gold



Pearl Nickel



Antique Copper



Aged Bronze



Antique Brass



Dark Brass



Brushed Grey

IP Rating:

IP20 and IP44 options

Optics:

15°/24°/36°

UGR:

< 10

CRI:

98Ra

Lifetime:

>50,000 hrs (L70 B10)

CCT:

2700K/3000K/3500K/4000K/5000K/
2000K-3000K/1800K-4000K/2700K-6000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 36V 200mA 8W

Ambient temp:


-20 °C to 45 °C

Class:

II


Material:

Fine aluminium 6063A




8W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	7550	0.11
1.0	1888	0.22
1.5	839	0.34
2.0	472	0.45
2.5	302	0.56
3.0	210	0.67



8W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	2868	0.24
1.0	717	0.49
1.5	319	0.73
2.0	179	0.98
2.5	115	1.22
3.0	80	1.46



8W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	2108	0.36
1.0	527	0.72
1.5	234	1.08
2.0	132	1.44
2.5	84	1.80
3.0	59	2.16



DuraGreen project:
Dunn-Edwards Showroom



W system	lm system	optics	code
8W	328	15°	AFL5708W-IO-30N15-B
8W	404	24°	AFL5708W-IO-30N24-B
8W	499	36°	AFL5708W-IO-30N36-B

Designed with ease and convenience in mind, these fixtures feature a user-friendly pull mechanism that enables your favorite pieces, artwork, or decor to be highlighted. From sculptures to paintings, let ACME SPY bring your treasures to life with precise, targeted radiance, adding both function and form to your stylish space.



DuraGreen project:
AXENT Showroom